

QUALITY AIR FOR LIFE

We care about the food we eat, and the water that we drink; But what about the air that we breathe?

Indoor Air Quality (IAQ) is an increasingly prevalent concern in a world faced with rising levels of pollution, temperatures and climate change. At Panasonic, we're committed to delivering more than just cooling and heating solutions, we consistently strive to help you make positive choices, bringing you Quality Air, for Life.

18 We breathe in AlR a person a day

FOOD
1.3kg

WATER ∃17k

> a person a day



Class Leading Features



QUALITY AIR FOR LIFE





Quality Air for Life

At Panasonic, we're committed to delivering more than just cooling & heating solutions, we consistently strive to improve the quality of your air, so that you can improve the quality of your life.

Market Leading Connectivity

Control your air in more ways with Panasonic air conditioning's market leading connectivity; Now Google Assistant & Amazon Alexa compatible*.

Refer to page 9 for terms and conditions.

*Time of release Quarter 3 2019. Google is a trademark of Google LLC. Amazon, Alexa and all related logos are trademarks of Amazon.com,Inc. or its affiliates.



AEROWINGS

Superior Airflow

Panasonic's Air Conditioners utilise AEROWINGS technology to deliver precise control of airflow direction, as well as powerful cooling, for a comfortable environment.








Control, Comfort & Reassurance

As well as a Cool/Warm, Comfortable home, a Panasonic air conditioner provides the ultimate peace of mind with our Anti-Bacterial Filter, quiet operation, and our 5 year warranty.

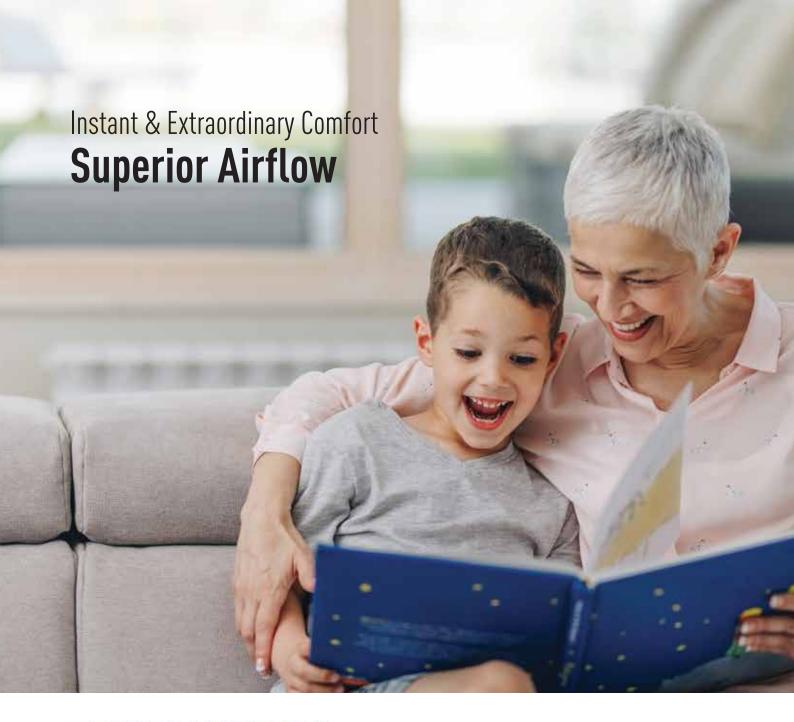


AEROWINGS

Concentrated Airflow, Further

Further and faster airflow across the room.



Concentrated Airflow, Further, Faster



- 1 2 Independent Motors
 Control the Sub-Blade and Bigger Outer Blade separately.
- 2 Sub-Blade Compresses and concentrates cool air.
- Bigger Outer Blade Helps to deliver airflow further.







Powerful Cooling

Featuring twin motorised blades that direct airflow downwards, a concentrated stream of air is delivered to adjust the temperature of the room faster, providing a unique POWERFUL COOLING experience.

Temperature Distribution Test





warmer

→ cooler

Conventional Cooling

Slow cooling will result in uneven cooling.

Powerful Cooling

Concentrated airflow cools room instantly and evenly.

Panasonic Air Conditioners
utilise AEROWINGS' twin
motorised blade technology to
distribute air evenly throughout
the room, cooling instantly and
evenly. Compared to
conventional cooling
mechanisms, Panasonic's
POWERFUL COOLING technology
achieves complete room
comfort, fast.

Air Flow

Air Flow Smoke Test




AEROWINGS directs airflow downwards to cool instantly



AEROWINGS directs airflow upwards over wider area then showers down gently and evenly across the room

Top Air Intake



Hot air is drawn in from the top and cool air is discharged from the bottom to facilitate cool air showering down over the entire area.

A Smarter Way to

Control Your Air



The Panasonic Comfort Cloud App & WLAN Smart Adaptor deliver convenient control, connectivity and comfort. Seamlessly adjust temperature, monitor energy consumption, change modes, etc. all from just one mobile device*.

Now Google Assistant and Amazon Alexa Compatible*.



SMART Control
Control, monitor & analyse up to 200 units in multiple locations from just one device.



SMART Comfort Control your comfort 24 hours a day with remote AC access features, air purification functionality and much more.



SMART Efficiency
Analyse and compare energy consumption, improving energy efficiency and cost effectiveness.



SMART Assist
Monitor & manage air conditioner troubleshooting effortlessly
whilst assigning user control permissions.



Intuitive Voice Control

Introducing intuitive voice control with Google Assistant and Amazon Alexa control compatibility*. Using your existing Google assistant or Alexa devices, control your air conditioner with just your voice.

*CZ-TACG1 & updated firmware required.





Compatible Device and Browsers

1. iOS 9.0 or above

2. Android 4.4 or above





Please note: This is not a definitive list of all compatible devices, other similiar devices which use supported Operating Systems should also work either via dedicated Apps. Please note that user experience may vary slightly depending on hardware and software combination.

* CZ-TACG1 WLAN Adaptor required per unit. Requires an Internet connection and the App downloaded from the App Store or GooglePlay Store on your smartphone or tablet with the latest Operating System available. "To use Amazon Alexa to control your air conditioner, you will need an Amazon Echo device. "Time of release Quarter 3 2019. Google is a trademark of Google LS. Amazon, Alexa and all related logos are trademarks of Amazon.com, Inc. or its affiliates.

*Wireless LAN Remote Control for Internet Connection required optional network adaptor.

*Indoor temperature display and some special function are not available through the App for all models.

*Indoor image displayed may not match with actual unit.

WALL-MOUNTED : AERO SERIES STANDARD REVERSE CYCLE INVERTER Single -Split Type



CS-RZ25VKRW | CS-RZ35VKRW | CS-RZ42VKRW



CS-RZ50VKRW | CS-RZ60VKRW | CS-RZ71VKRW | CS-RZ80VKR



Wireless Remote Controller



CZ-RD514C Wired Remoted Controller (Optional)



Network Adaptor*1 (Optional)





Wireless Remote Controller



CZ-RD514C Wired Remoted Controller (Optional)



Network Adaptor*1 (Optional)



Cooling (): Outdoor Unit EER : Cooling Efficiency Heating COP: Heating Efficiency

SPECIFICATIONS

MODEL		(240V / 1 Phase / 50Hz)			CS-RZ25VKRW	CS-RZ35VKRW	CS-RZ42VKRW	CS-RZ50VKRW	CS-RZ60VKRW	CS-RZ71VKRW	CS-RZ80VKR
					[CU-RZ25VKR]	[CU-RZ35VKR]	[CU-RZ42VKR]	[CU-RZ50VKR]	[CU-RZ60VKR]	[CU-RZ71VKR]	[CU-RZ80VKR]
	oling / Heating	(min-max) kW		2.50 [0.90-3.00] 3.00 [0.90-3.60]	3.50 [0.90-3.90] 3.70 [0.90-5.10]	4.20 [0.90-4.60] 5.10 [0.90-6.80]	5.00 [0.98-5.60] 5.80 [0.98-7.80]	6.00 [0.98-6.60] 6.50 [0.98-8.00]	7.10 [1.70-8.10] 7.50 [1.70-9.90]	8.00 [2.30-9.00] 9.00 [2.20-11.00]	
Capacity		(min-max) Btu/h		8,530 [3,070-10,200] 10,200 [3,070-12,300]	11,900 [3,070-13,300] 12,600 [3,070-17,400]	14,300 [3,070-15,700] 17,400 [3,070-23,200]	17,100 [3,340-19,100] 19,800 [3,340-26,600]	20,500 [3,340-22,500] 22,200 [3,340-27,300]	24,200 [5,800-27,600] 25,600 [5,800-33,800]	27,300 [7,840-30,700] 30,700 [7,500-37,500]	
Air Flow		Indoor L/s		180/185	195/213	198/213	332/339	352/352	369/400	385/400	
Del	humid			L/h	1.5	2.0	2.4	2.8	3.3	4.1	4.7
Ela	ctrical Data	Running Current A		2.60/2.90	3.70/3.70	5.10/5.90	6.70/6.80	8.00/8.20	9.70/8.80	11.50/12.30	
Lie	cti icat Data	Power Input (min-max) kW		0.57 (0.20-0.89) 0.64 (0.19-1.04)	0.80 (0.20-1.19) 0.80 (0.19-1.42)	1.18 (0.25-1.64) 1.36 (0.20-2.04)	1.47 (0.28-1.73) 1.54 (0.26-2.30)	1.85 (0.28-2.20) 1.89 (0.26-2.64)	2.19 (0.45-2.67) 2.06 (0.40-2.85)	2.48 (0.46-2.98) 2.66 (0.50-3.30)	
AEER/EER ACOP/COP		W/W W/W		4.29/4.39 4.59/4.69	4.31/4.38 4.55/4.63	3.52/3.56 3.71/3.75	3.37/3.40 3.74/3.77	3.22/3.24 3.42/3.44	3.22/3.24 3.62/3.64	3.21/3.23 3.37/3.38	
Sta	ır Rating			4.0 4.0 2.5 2 4.5 4.5 2.5 2		2.0 2.5	1.5 2.0	1.5 2.5	1.5 2.0		
	Sound Pressu		Indoor (H / L / Q	-Lo)	40/25/19 40/27/21	44/26/19 44/29/22	45/31/29 44/35/28	44/34/31 44/33/29	46/36/33 46/36/33	49/37/34 49/37/34	51/38/35 50/38/35
Level	Level*2dB(A)		Outdoor (H / Q	-Lo)	48/- 49/-	49/- 50/-	49/- 51/ -	48/43 49/44	49/44 51/46	52/47 54/49	55/50 55/50
Noise Level	Sound Power L	- I aval dR	Indoor (H / L / Q	-Lo)	56/41/35 56/43/37	60/42/35 60/45/38	61/47/45 60/51/44	60/50/47 60/49/45	62/52/49 62/52/49	65/53/50 65/53/50	67/54/51 66/54/51
		Level ub	Outdoor (H / Q	-Lo)	63/- 64/-	64/- 65/-	64/- 66/-	63/58 64/59	64/59 66/61	66/61 68/63	69/64 69/64
Net Weight		Indoor (Outdoor) kg		8(27)	8(31)	8(32)	12[34]	13(36)	13(50)	13(60)	
Din	nensions	Indoor (H Outdoor (H	1 x W x D) 1 x W x D)	mm mm	290 x 799 x 197 542 x 780 x 289	290 x 799 x 197 542 x 780 x 289	290 x 799 x 197 619 x 824 x 299	302 x 1,102 x 244 619 x 824 x 299	302 x 1,102 x 244 619 x 824 x 299	302 x 1,102x 244 695 x 875 x 320	302 x 1,102 x 244 795 x 875 x320
	frigerator Pipe	Liquid Sid	e mm/(i	nch)	ø 6.35 (1/4)	ø 6.35 (1/4)	ø 6.35 (1/4)	ø 6.35 [1/4]	ø 6.35 (1/4)	ø 6.35 (1/4)	ø 6.35 (1/4)
Dia	ımeter	Gas Side	mm/(i	nch)	ø 9.52 (3/8)	ø 9.52 (3/8)	ø 12.70 (1/2)	ø 12.70 (1/2)	ø 12.70 (1/2)	ø 15.88 (5/8)	ø 15.88 (5/8)
Pip	e Extension Len	gth	min-max	min-max (m) 3-20 3-20 3-20		3~30	3~30	3-30	3~30		
Ма	ximum Elevation	n Length		m	15	15	15	15	15	20	20
Pipe Length For Add		ditional Gas m		7.5	7.5	7.5	10	10	10	10	
Add	ditional Gas Amo	ount g/m			10	10	10	15	15	25	25
Power Supply				Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	Outdoor	
Operating Range (Outdoor) Cool Heat		Cooling Degree Heating Degree	°C	-10 ~ +46 -15 ~ +24	-10 ~ +46 -15 ~ +24	-10 ~ +46 -15 ~ +24	-10 ~ +46 -15 ~ +24	-10 ~ +46 -15 ~ +24	-10 ~ +46 -15 ~ +24	-10 ~ +46 -15 ~ +24	
Refrigerant Type				R32	R32	R32	R32	R32	R32	R32	

 $^{^{*1}}$ Indoor temperature display and some special function are not available through the App for all models.

SPECIFICATIONS & FEATURES

 $Products in this brochure contain R32 \ refrigerant. \ Please \ refer to \ Panasonic's \ installation \ instructions \ and \ service \ manuals \ before \ installation \ and \ servicing \ this \ product.$

Only persons and/or companies qualified and experienced in the installation, service and repair of refrigerant products should be permitted to do so.

The purchaser must ensure that the person and/or company who is to install, service or repair this air conditioner has qualifications and experience in refrigerant products.

Suitable access for warranty and service is required.

 $Future\ improvement, specifications, designs\ of\ product\ and\ availability\ are\ subject\ to\ change\ without\ notice.\ Please\ check\ with\ your\ dealer.$

ALL CAPACITY AND ENERGY EFFICIENCY RATINGS ARE BASED ON AS/NZS3823.1.1

start-up or variations in power supply and load conditions.

COOLING	Indoor temperature Outdoor temperature	27°C DB/19°C WB 35°C DB
HEATING	Indoor temperature Outdoor temperature	20°C DB 7°C DB / 6°C WB
Running current	is at rated conditions (AS3823) and	d does not include compressor

^{*2} Sound pressure level specification is measured according to JIS C9612.

FEATURES EXPLANATION

INVERTER CONTROL

Varies the rotation speed of the compressor for higher energy savings.



ECO MODE

More energy saving compared to the normal mode by automatically adjusting the set temperature by up to 2°C. It's ideal when you want to maintain room temperature for gentle cooling and heating.



COMFORT

Allows you to run the fan without any cooling or heating, thus giving just ventilation.



HOT START CONTROL

On the start of the heating cycle and after the defrost cycle, the indoor fan will start up once the indoor heat exchanger is warm.



POWERFUL MODE

Pressing the Powerful button cools or heats the room quickly. It provides fast comfort, with full power and a strong airflow. This is perfect for use immediately after coming home, or when unexpected guests arrive.



SOFT DRY OPERATION MODE

Starts with cooling to dehumidify, then provides continuous breeze at a low frequency to keep a room dry without much change to the



MANUAL HORIZONTAL AIRFLOW DIRECTION CONTROL



QUIET MODE

Enjoy the comfort of running your air conditioner at night and still have a relaxing sleep.



AUTO CHANGEOVER (INVERTER)

In Auto Mode the unit will select if heating or cooling is required.



PERSONAL AIRFLOW CREATION

Vertical and horizontal airflow patterns can be combined as desired to achieve optimum comfort, with operation possible by remote, even from a distance.

* CS-RZ50VKRW, CS-RZ60VKRW, CS-RZ71VKRW & CS-RZ80VKR only



AIRFLOW DIRECTION CONTROL (UP & DOWN)

Vertical airflow patterns can be controlled with operation by remote, even from a distance.





CLEAN & HEALTHY AIR

ANTI-BACTERIAL FILTER

The Anti-Bacterial Filter combines three effects in one: anti-allergen, anti-virus and anti-bacterial protection to provide clean air.



ODOUR-REMOVING FUNCTION

With this function, there's no unpleasant odor when the unit starts up. That's because the fan remains off momentarily, while the source of the odour inside the air conditioner is suppressed.

The unit must be in cool or dry mode and the fan speed must be set to automatic.



REMOVABLE, WASHABLE PANEL

Gives you easy access to the filter as well making the unit easy to clean.



CONVENIENCE

24-HOUR DUAL ON & OFF REAL SETTING TIMER

This feature enables you to preset two different sets of start/stop operation timer (hour and minute) within a 24-hour time frame.



3RD PARTY CONNECTIVITY

Allows limited control from an external source when wired to do so.



WIRED REMOTE CONTROL (OPTIONAL)

For use in commercial applications, or where users don't want a remote control.



اس

DEMAND RESPONSE ENABLING DEVICE (DRED)

Allows Electrical Utility Companies to regulate the power supply to the units if connected.



DRFD


LCD WIRELESS REMOTE CONTROL


Easy control of the unit from anywhere in the room



WIRELESS LAN REMOTE CONTROL FOR INTERNET CONNECTION (OPTIONAL)

Control air conditioners remotely by turning your mobile desire into a remote controller using internet connection.





RELIABILITY

BLUE FIN CONDENSER

Extra protection from the elements with a longer



TOP-PANEL MAINTENANCE ACCESS

Easy access for maintenance.



RANDOM AUTO RESTART

When multiple units are connected and there is power outage, they will turn on at different times in order to not spike the power supply.



LONG PIPING

Long piping offers more flexible installation options. *20m - CS-RZ25VKRW, CS-RZ35VKRW, CS-RZ42VKRW
*30m - CS-RZ50VKRW, CS-RZ60VKRW, CS-RZ71VKRW, CS-RZ80VKR



SELF-DIAGNOSTIC FUNCTION

Should a malfunction occur, the unit diagnoses the problem and shows the corresponding alphanumeric code. This allows for quicker



OUTDOOR







CU-RZ25VKR CU-RZ35VKR



CU-RZ42VKR CU-RZ50VKR CU-RZ60VKR



CU-RZ71VKR



CU-RZ80VKR

AIR IS LIFE

AIR IS COMFORT

AIR IS ENERGY

QUALITY AIR FOR LIFE

- Please read the Installation Instructions carefully before installing the unit, and the Operating Instructions before using it.
- $\,\blacksquare\,$ Specifications are subject to change without prior notice.
- The contents of this catalogue are accurate as of May 2019.
- Due to printing considerations, the actual colours may vary slightly from those shown.
- All graphics are provided merely for the purpose of illustrating a point.



Do not add or replace refrigerant other than the specified type. Manufacturer is not responsible for the damage and deterioration in safety due to usage of other refrigerant.

19RAC0501RZ

Panasonic Australia Pty. Limited

1 Innovation Road, Macquarie Park, NSW 2113 ACN 001 592 187 ABN 83 001 592 187 Website: aircon.panasonic.com.au Authorised Dealer

